

NOE/F/G18 & NOE/F/G35 Heavy Oil Burner 161kW - 893kW



NOE/NOF/NOG Heavy Oil Burner features:

- Burner mounted control panel
- 2 stage control (high/low)
- NOE - Class 'E' oil 8 cSt @ 100°C
- NOF - Class 'F' oil 20 cSt @ 100°C
- NOG - Class 'G' oil 40 cSt @ 100°C
- Air damper: NOE - hydraulic
NOF - hydraulic
NOG - electric motor fully closing
- Oil Heater - Included with burner to heat oil for atomisation
Burner mounted for high/low control, and for modulating control
(Intermittent operation on NOG during standby to maintain oil temperature for immediate restart)
- All burners require a pre-heated ringmain oil supply, minimum temperature @ 16°C for Class 'E' oil, 43° for Class 'F' oil and 83°C for Class 'G' oil.
- All kW ratings are nett CV
- Quiet in operation and designed for easy maintenance
- Suitable for high resistance boilers
- Industry standard components easily available
- Optional Extras: Modulating control
Air inlet silencer
Fully closing air damper (NOE and NOF)
Acoustic cover (wheel-over)
Water level control panel (AOTC)
Separate floor-standing oil pumping and heating unit




For more information on all Nu-way products
please visit www.nu-way.co.uk


Enertech Group

Type		NOE/F/G 18			NOE/FG 35		
Capacity	kW	161-510			342-893		
Motor	V/ph/Hz	380-420 / 3 / 50			380-420 / 3 / 50		
		18-25	18-34	18-38	35-25	35-34	35-38
	kW	1.1	2.2	3.0	1.1	2.2	3.0
Pre-Heater	kW	3.0	3.0	3.0	4.5	4.5	4.5
Start current	A/each phase	19.2	29.2	39.2	21.3	31.3	41.3
Run current	A/each phase	6.7	8.8	10.3	8.8	10.9	12.6
Cable size	mm ²	1.5	1.5	2.5	1.5	2.5	2.5
Fuse		20	15	20	20	20	20
Fuel connection							
Control box		LAL			LAL		
Fuel pump		Suntec			Suntec		
Pressure gauge		•	•	•	•	•	•
Control Options		2 Stage / Modulating			2 Stage / Modulating		
Noise @ 1m	dBa	77	84	86	78	84	86
Gross weight	kg	115	115	129	115	115	129
Volume	m ³	0.759	0.759	0.759	0.759	0.759	0.759

• Standard * Accessories
Other electrical supply options available on request.

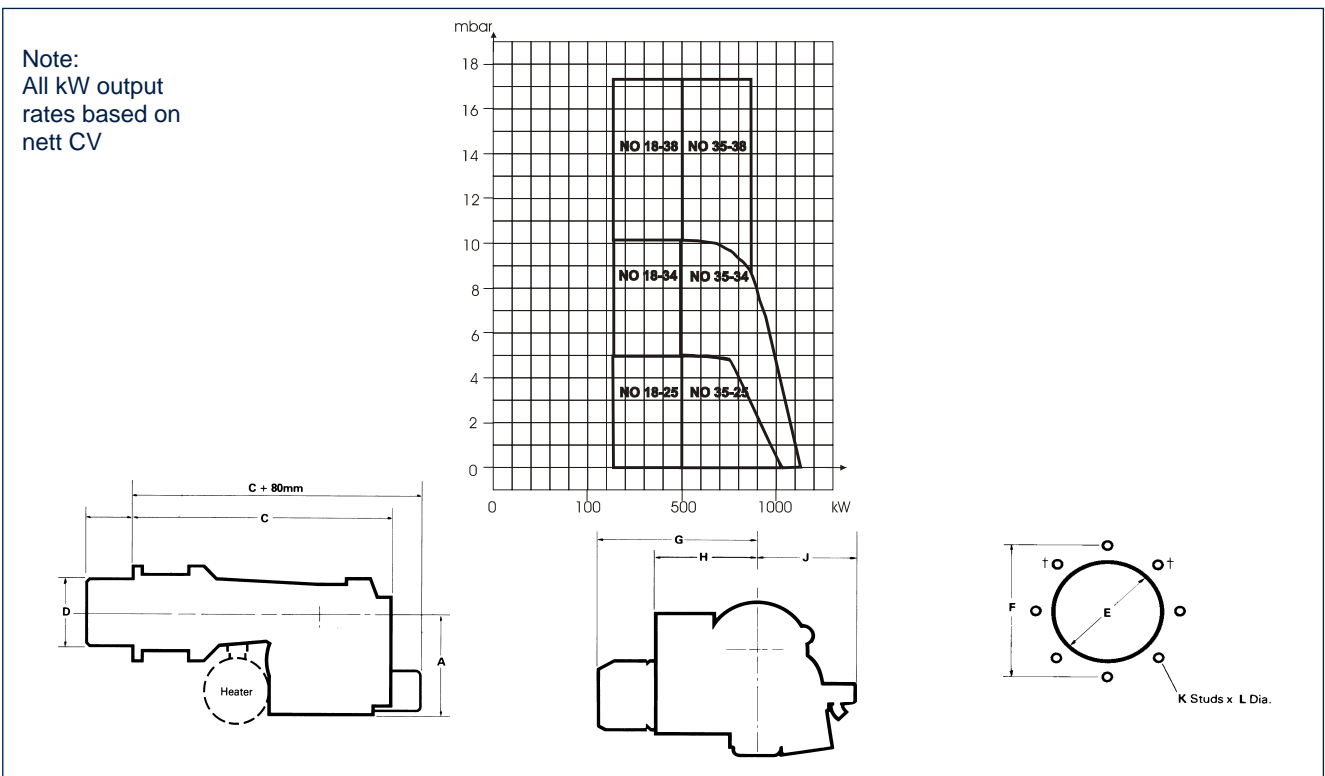

Burner	A	C	D	E	F	G	H	J	K	L
NOE/FG18-25	314	785	178	230	254	352	340	315	8	M10
NOE/FG18-34	387	978	182	230	305	420	340	337	8	M10
NOE/FG18-38	480	1029	182	230	305	457	340	350	8	M10
NOE/FG35-25	314	785	178	230	254	352	340	315	8	M10
NOE/FG35-34	387	978	182	230	305	420	340	337	8	M10
NOE/FG35-38	480	1029	182	230	305	457	340	350	8	M10

Enertech Limited, P O Box 1, Vines Lane
Droitwich, Worcestershire, WR9 8NA

tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017
email: info@nu-way.co.uk • web: www.nu-way.co.uk



Enertech Group

Issue Aug 2011