

MOL 1175 Oil Burner





MOL 1175 Oil Burner features:

- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- Designed for 2 or 3 stage operation
- Plug-in contact facilitates the installation
- With hydraulic air or servo motor adjustment
- Fuel – Light distillate oil Class D (1.5-5.5 cSt @ 40°C)
- All kW ratings are nett CV



For more information on all Nu-way products
please visit www.nu-way.co.uk

Type			MOL 1175
Capacity		kW	285-1174
Motor	V/Hz	400 / 50	
	kW / A (Fuse) + A (control fuse)	1.5 / 3 x 16 + 6	
Start / Run Current	Amps	14.5 / 2.9	
Control box		Siemens LMO24	
Fuel pump		Danfoss RSA125	
Gross weight	kg	50	
Volume	m ³	0.30	

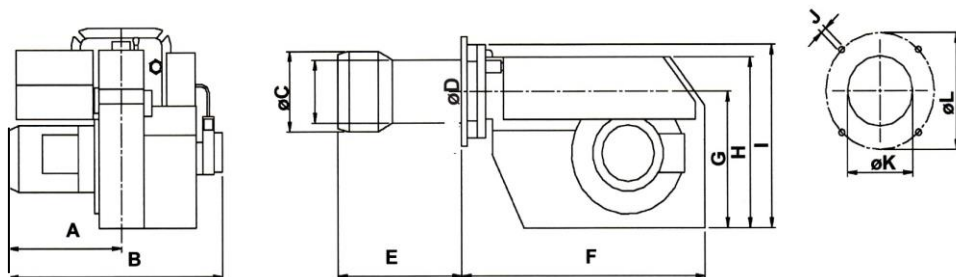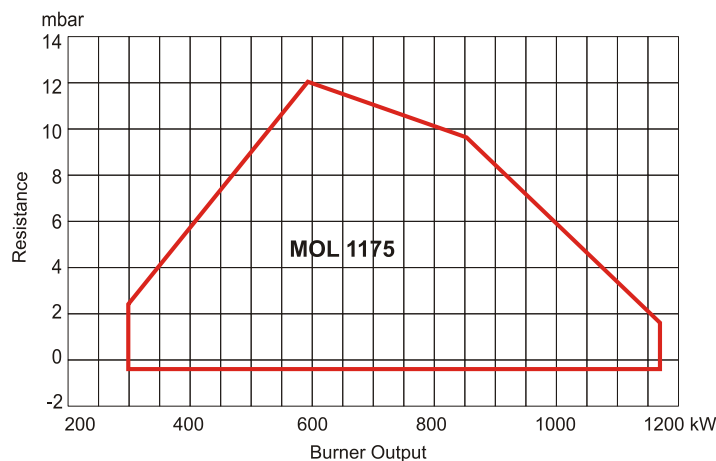

Burner	A	B	øC	øD	E*	F	G	H	I	J	øK	L
MOL 1175	290	595	210	155	258	610	321	400	405	M12	(160) 215	254-295

* Extended Lengths Available

	2-nozzle	3-nozzle	Servo motor	Hydraulic air regulation	Diffuser plate optimiser
MOL 1175-2	•		•		
MOL 1175-2H	•			•	
MOL 1175-3R		•	•		•

Enertech Limited, Ten Acres, Berry Hill Industrial Estate,
Droitwich Spa, Worcestershire, WR9 9AQ

tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017
email: info@nu-way.co.uk • web: www.nu-way.co.uk

NU-WAY
Enertech Group

23-10-2018