

NOL180

Light Oil Burner

1125kW - 4450kW



NOL180 Oil Burner features:


- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- Designed for 2 stage (high/low) operation
(See separate data sheet for modulation)
- Plug-in contact facilitates the installation
- Fuel - Light Oil (Class D) (1.5 – 5.5 cSt at 40°C)
- Separate oil pump motor
- Air inlet silencer fitted as standard
- Optional Extras - Water level control (AOTC) panel
- All kW ratings are nett CV



For more information on all Nu-way products
please visit www.nu-way.co.uk

Type	NOL180	
Capacity	kW	1125-4450
Motor	V/ph/Hz kW	380-420 / 3 / 50 15
Start current	A/each phase	92
Run current	A/each phase	30
Cable size	mm ²	10
Fuse		40
Control unit		LAL
Fuel pump		HP Technik
Oil Pump Motor	kW	0.75
Fuel connection	inch	0.75
Pressure gauge		Fitted as standard
Control options		2 Stage / Modulating
Noise @ 1m	dBA	92
Gross weight	kg	440
Volume	m ³	150 x 100 x 90

Other options available on request

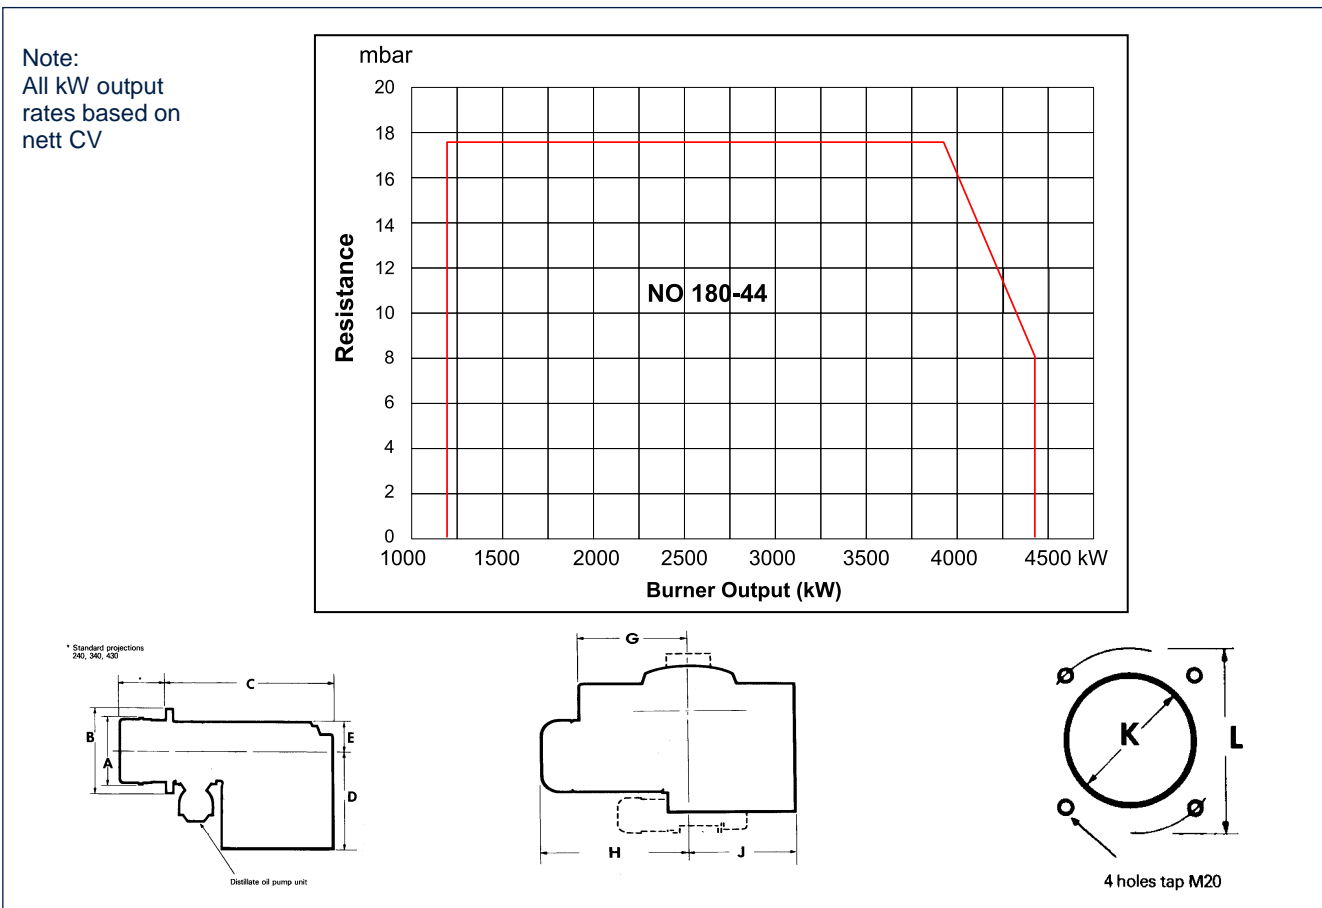

Burner	A	B	C	D	E	G	H	J	K	L PCD
NOL180-44	325	420	910	500	145	535	545	435	330	454

Enertech Limited, Ten Acres, Berry Hill Industrial Estate,
Droitwich Spa, Worcestershire, WR9 9AQ

tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017
email: info@nu-way.co.uk • web: www.nu-way.co.uk



Enertech Group

23-10-2018