

NOL85-38 & NOL100-38 Oil Burner 1742kW - 2767kW



NOL85-38 / NOL100-38 Oil Burner features:

- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- Designed for 2 stage (high/low) operation (Modulation control optional extra)
- Plug-in contact facilitates the installation
- Fuel - Light Oil (Class D) (1.5 – 5.5 cSt at 40°C)
- Optional Extras
 - Air inlet silencer
 - Water level control (AOTC) panel
- All kW ratings are nett CV





For more information on all Nu-way products
please visit www.nu-way.co.uk

Type		NOL85-38	NOL100-38
Capacity	kW	1742 – 2327	2327 - 2767
Fan Motor	V/ph/Hz	380-420 / 3 / 50	380-420 / 3 / 50
	kW	5.5	7.5
Start current	A/each phase	40	60
Run current	A/each phase	11.5	14.4
Cable size	mm ²	2.5	4.0
Fuse	HRC (A)	20	25
Control box		LAL	LAL
Fuel pump		Suntec	Suntec
Fuel connection	inch BSP	0.5	0.75
Control options		2 Stage / Mod	2 Stage / Mod
Noise @ 1m	dBA	90	98
NOx*	mg/kWh	<120	<120
Gross weight	kg	118	126
Volume	m ³	0.95	1.28

• Other electrical options available on request.

*Typical NOx level subject to combustion chamber design and site conditions.

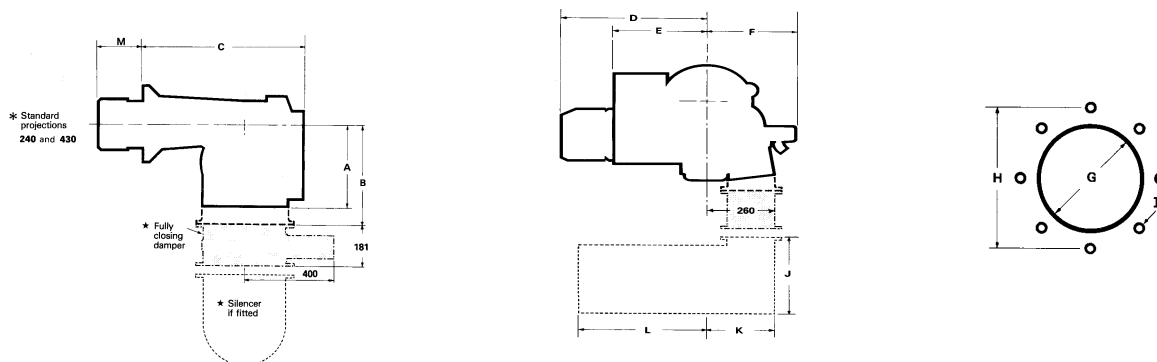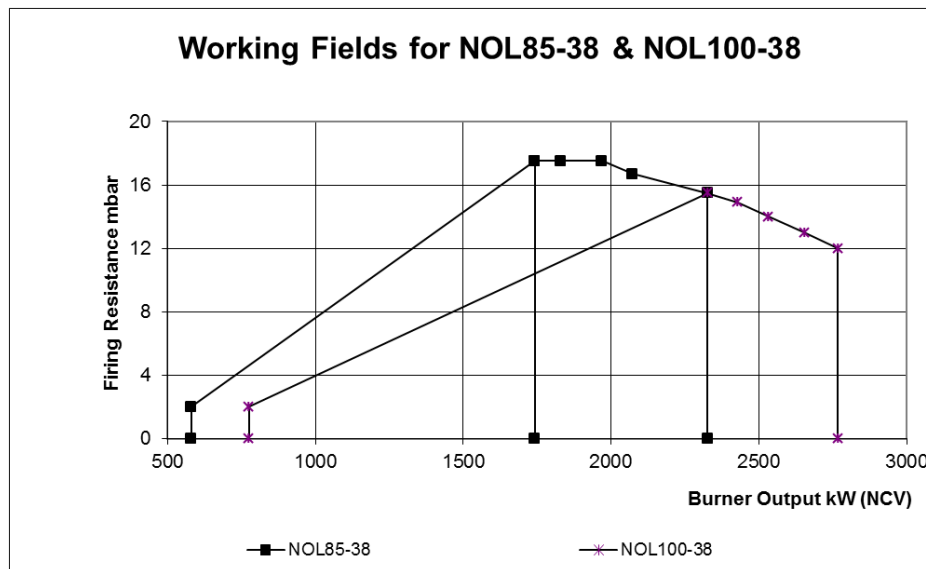

Burner	B	C	D	E	F	G	H	I	J	K	L	M*
NOL85-38	480	737	537	490	350	280	305	10	381	260	476	230/430
NOL100-38	480	737	437	490	365	280	305	10	381	260	476	230/430

* Other options available

Enertech Limited, Ten Acres, Berry Hill Industrial Estate,
Droitwich Spa, Worcestershire, WR9 9AQ

tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017
email: info@nu-way.co.uk • web: www.nu-way.co.uk



Enertech Group

23-10-2018