

NOG100-125-150

Heavy Oil Burner

1708kW - 4129kW



NOG Heavy Oil Burner features:

- Burner mounted control panel
- 2 stage control (high/low)
- NOG - Class 'G' oil 40 cSt @ 100°C
- Air damper: NOG - electric motor fully closing
- Oil Heater - Included with burner to heat oil for atomisation
Separate pumping & heating unit for high/low control and for modulating control
(Intermittent operation on NOG during standby to maintain oil temperature for immediate restart)
- All burners require a pre-heated ringmain oil supply, minimum temperature @ 83°C for Class 'G' oil.
- All kW ratings are nett CV
- Quiet in operation and designed for easy maintenance
- Suitable for high resistance boilers
- Industry standard components easily available
- Optional Extras: Modulating control
Air inlet silencer
Acoustic cover (wheel-over)
Water level control panel (AOTC)




For more information on all Nu-way products
please visit www.nu-way.co.uk


Enertech Group

Type		NOG100		NOG125			NOG150		
Capacity	kW	1708-2768		2768-3453			3453-4129		
Motor	V/ph/Hz	380-420 / 3 / 50		380-420 / 3 / 50			380-420 / 3 / 50		
		100-41	100-44	125-36	125-41	125-44	150-36	150-41	150-44
	kW	11	15	7.5	11	11	7.5	11	15
Pre-Heater	kW	7.5	7.5	9.0	9.0	9.0	12.0	12.0	12.0
Start current	A/each phase	82.5	82.5	69.5	84.5	84.5	88.7	88.7	100
Run current	A/each phase	33.3	33.3	28.1	35.3	35.3	39.5	39.5	46.5
Cable size	mm ²	16	16	10	10	10	16	16	16
Fuse		50	50	40	40	40	60	60	60
Control unit		LAL		LAL			LAL		
Fuel pump		Danfoss		Danfoss			Danfoss		
Oil Pump Motor	kW	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
Fuel connection	inch	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75
Pressure gauge		•	•	•	•	•	•	•	•
Control options		2 Stage / Mod		2 Stage / Mod			2 Stage / Mod		
Noise @ 1m	dB(A)	91	92	90	91	92	91	92	92
Gross weight	kg	318	318	318	318	318	318	318	318
Volume	m ³	1.872	1.872	1.872	1.872	1.872	1.872	1.872	1.872

• Standard
Other electrical supply options available on request.

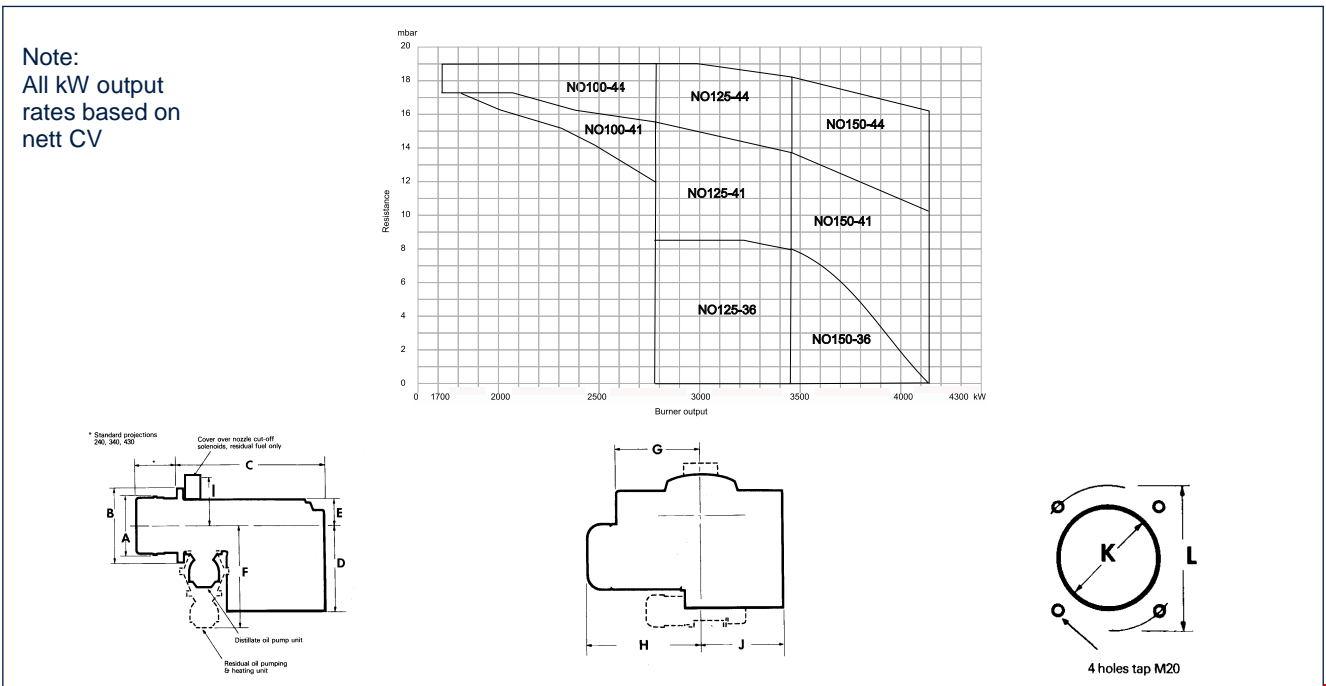

Burner	A	B	C	D	E	F	G	H	I	J	K	L PCD
NOG100-41	325	420	910	500	145	600	535	545	275	435	330	454
NOG100-44	325	420	910	500	145	600	535	545	275	435	330	454
NOG125-36	325	420	910	500	145	600	535	545	275	435	330	454
NOG 125-41	325	420	910	500	145	600	535	640	275	435	330	454
NOG125-44	325	420	910	500	145	600	535	640	275	435	330	454
NOG150-36	325	420	910	500	145	600	535	640	275	435	330	454
NOG150-41	325	420	910	500	145	600	535	640	275	435	330	454
NOG150-44	325	420	910	500	145	600	535	640	275	435	330	454

Enertech Limited, Ten Acres, Berry Hill Industrial Estate,
Droitwich Spa, Worcestershire, WR9 9AQ



tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017
email: info@nu-way.co.uk • web: www.nu-way.co.uk

Enertech Group
23-10-2018